


FEATURES

- > 600 TV Lines Super High Resolution
- > SONY 1/3" Super HAD II Color CCD
- > MAX DR (Dynamic Range)
- > 3D DNR (Digital Noise Reduction)
- > Day & Night by DSS (Digital Slow Shutter)
- > OSD Control, Motion Detection, Privacy Masking, etc
- > C or CS-Mount Lens Compatible
- > DC12V or DC12V/AC24V Power Source

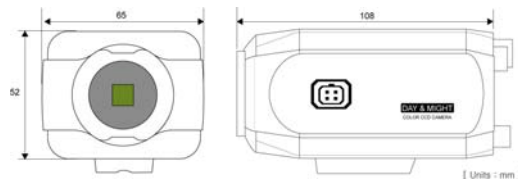

SPECIFICATIONS

ITEM		NTSC	PAL
Total Pixels		811(H) x 508(V)	795(H) x 596(V)
Effective Pixels		768(H) x 494(V)	752(H) x 582(V)
Sensor		1/3" Sony Super HAD II CCD	
Scanning System		2:1 Interlace	
E L E C T R I C A L	Resolution	More than 600 TV Lines	
	Video Output	1.0Vp-p Composite Signal (75ohm)	
	S/N (Y signal)	52dB or more (AGC OFF)	
	Min. Illumination	0.01Lux (0.0002LUX when Sense up ON)	
	Sense Up	On / OFF / Auto (Selectable x2 ~ x256)	
	AGC	OFF / LOW / MIDDLE / HIGH	
	White Balance	AWC / ATW / MANUAL / PUSH LOCK	
	Electronic shutter speed	1/60s - 1/100,000s	1/50s - 1/100,000s
	MAX DR (Dynamic Range)	On / OFF (Level Adjustable 0~20)	
	Digital Zoom	ON / OFF (x1 ~ x3)	
	DNR	3D	
	D&N Selection	AUTO / COLOR / BW	
	IR SMART	OFF	
	DIS	ON / OFF	
	Motion Detection	ON / OFF	
	Privacy Masking	6 Zone	
HME	On / OFF (Level Adjustable 0~60 : Highlight Mask Exposure Control)		
SHARPNESS	Adjustable		
O.S.D	Available		
Lens Mount		C or CS-Mount Compatible	
Operating temperature/Humidity		-10°C ~ +50°C / 0~80% RH	
Power Supply		DC12V 110mA	
Dimensions		65(W)mm x 52(H)mm x 118(D)mm	
Weight		Appx. 360g	

The specifications are subject to change without notice.

MIRACLEON INC.

www.miracleon.com

Head Office

#311, E&C Venture Dream Tower II, 197-10,
Guro-3dong, Guro-gu, Seoul, Korea (152-766)
Tel : 82-2-868-0348 Fax : 82-2-3471-9054
E-mail : info@miracleon.com

Factory

#508-1 Daeryung Technotown 2, 569-21,
Gasan-dong, Kumchon-gu, Seoul, Korea
(153-023)
Tel : 82-2-2109-8307 Fax : 82-2-830-8107